




Bajaj Praze Floodlight Series

Precise Broad Beam for Seamless Optimum Lighting.


Bajaj Praze Floodlight series is a go-to solution for enormous illumination. Boasting of a higher lumen per watt, the series is available from 150W to 200W and has a hassle-free installation and maintenance process. The product features a sound technical competency with powder coated aluminium die-cast housing and an external surge protection for maximum safety. It is also equipped with secondary lens optics for commendable optical performance.

TECHNICAL SPECIFICATIONS


PRAZE F 180L WH NB-A5 TG SD

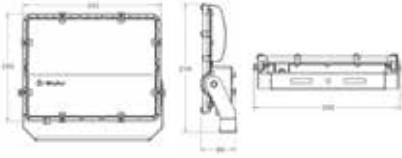

PRAZE F 216L WH NB-A5 TG SD

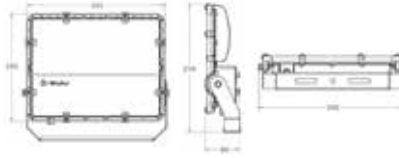

PRAZE F 240L WH NB-A5 TG SD

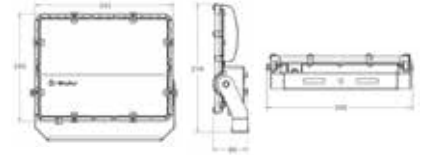

All dimensions in mm (± 3 mm Tolerance)

TECHNICAL INFORMATION

System Wattage	150W/180W/200W
Luminaire Efficacy	>120 lm/W
Correlated Colour Temperature	5665K \pm 355K
Colour Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature Range	-10°C to 50°C
Beam Angle (310%)	NB-A5 (60°)
Net Weight	4.5Kg. Approx.
Ingress Protection (IP)	IP66
Impact Resistance (IK)	IK07
Input Voltage	140 to 270V AC
Input Frequency	50 Hz
Power Factor	\geq 0.95
THD (@240V AC)	<10%
Built-in Surge protection	4 kV
External Surge protection	10kV

ORDERING DATA

Product Cat. Ref.	Case Lot
PRAZE F 180L WH NB-A5 TG SD	01 Nos.
PRAZE F 216L WH NB-A5 TG SD	
PRAZE F 240L WH NB-A5 TG SD	

(Also available in WW & NW)

APPLICATION AREAS

PARKING AREA

SMALL JUNCTION

PERIPHERY LIGHTING

*Images and visuals are for representation purpose only.