




Bajaj Praze Floodlight Series

Precise Broad Beam for Seamless Optimum Lighting.


Bajaj Praze Floodlight series is a go-to solution for enormous illumination. Boasting of a higher lumen per watt, the series is available from 80W to 120W and has a hassle-free installation and maintenance process. The product features a sound technical competency with powder coated aluminium die-cast housing and an external surge protection for maximum safety. It is also equipped with secondary lens optics for commendable optical performance.

TECHNICAL SPECIFICATIONS


PRAZE F 96L WH NB-A5 TG SD

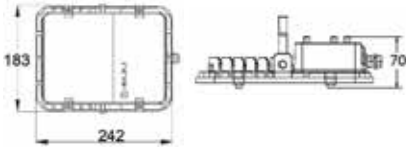

PRAZE F 120L WH NB-A5 TG SD

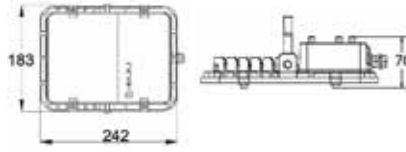

PRAZE F 144L WH NB-A5 TG SD

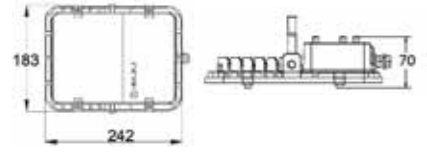

All dimensions in mm (± 5 mm Tolerance)

TECHNICAL INFORMATION

System Wattage	80W/100W/120W
Luminaire Efficacy	>120 lm/W
Correlated Colour Temperature	5665K \pm 3355K
Colour Rendering Index	>70
Maintenance of Lumen Output	50,000 hrs.
Operating Temperature Range	-10°C to 50°C
Beam Angle ($\pm 10\%$)	NB-A5 (60°)
Net Weight	2Kg. Approx.
Ingress Protection (IP)	IP66
Impact Resistance (IK)	IK07
Input Voltage	140 to 270V AC
Input Frequency	50 Hz
Power Factor	≥ 0.95
THD (@240V AC)	<10%
Built-in Surge protection	4 kV
External Surge protection	10kV

ORDERING DATA

Product Cat. Ref.	Case Lot
PRAZE F 96L WH NB-A5 TG SD	08 Nos.
PRAZE F 120L WH NB-A5 TG SD	08 Nos.
PRAZE F 144L WH NB-A5 TG SD	08 Nos.

(Also available in WW & NW)

APPLICATION AREAS

CONSTRUCTION
SITE

HOARDINGS

SHOP
BOARDS

RESIDENTIAL
COMPLEX

*Images and visuals are for representation purpose only.