




Ensuring optimum efficiency with low wattage **Bajaj Zela LED street lights**

Bajaj Zela is aesthetically designed LED Street Light with a robust pressure die cast aluminium housing with corrosion resistant powder coating and UV resistant non-yellowing secondary lens optics to ensure desired photometry. It is equipped with heat resistant toughened glass optical cover to ensure IP66 & IK07 protection.

BAJAJ ZELA LED Street Light

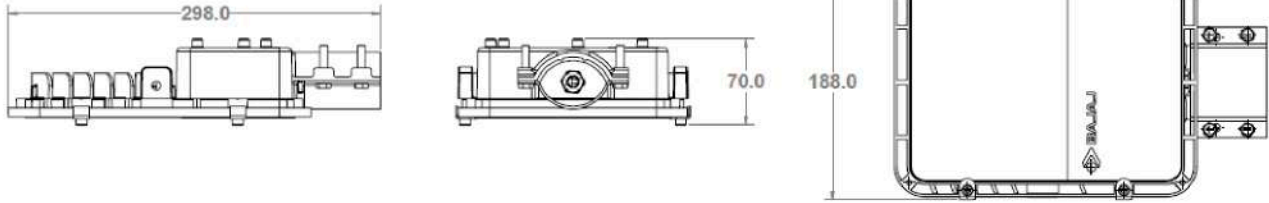

All dimensions in mm (± 5 mm Tolerance)

Technical Information

System Wattage	80W/90W/100W
Luminaire Efficacy	120 lm/W
Correlated Colour Temperature	5665K ± 355 K
Colour Rendering Index	>70
Maintenance of lumen output	50,000 hrs.
Operating Temperature Range	-10°C to 50°C
Net Weight	1.5 Kg. Approx.
Ingress Protection (IP)	IP66
Impact Resistance (IK)	IK07
Input Voltage range	140 to 270V AC
Input Frequency	50 Hz
Power Factor	≥ 0.95
THD (@240V AC)	<10%
Built-in Surge protection	4 kV
External Surge protection	10kV

Ordering data

Product Code	Cat Ref	Rated Wattage
114071	ZELA P 96L WH PO TG SD	80W
114045	ZELA P 108L WH PO TG SD	90W
114069	ZELA P 120L WH PO TG SD	100W

XXL: Lumens

YY: CCT:- WH (5700°K), NW (4000°K), WW (3000°K)

PO: Performance Optics

*Images and visuals used are for representation purpose only.