




INDUSTRIAL LIGHTING VERDANT

BIWIDP 42W LED

Integral wellglass LED Luminaire

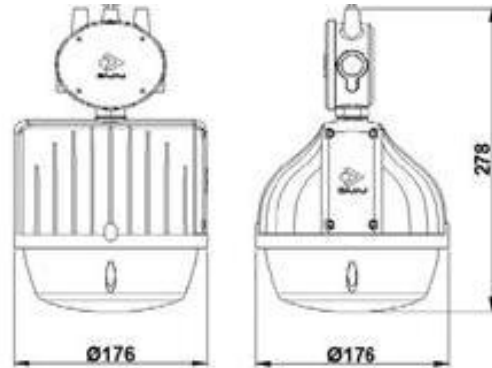

Dimensions in mm Tolerance +/-5

Application

- Thermal Power Stations,
- Fertilizers plants,
- Pelletizing Plants,
- Cement Factories,
- Paper Mills, industrial bays,
- Energy effective one-to-one replacement of 70W HPSV/MH well glass luminaire.

Specification / Features

- Epoxy Powder coated finished pressure die cast aluminum lamp housing.
- Diffused polycarbonate front cover in wellglass form with specially designed gasket.
- Built in control gear for 42W LED.
- Junction Box provided for easy installation with Loop in-Loop out.
- LED CCT: 5700°K. ±300°K
- I-Bolt is provided for easy installation.
- Degree of protection: IP65

Electrical Data

Product Code	Cat. Ref.	System Wattage (Watts)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
169600	BIWIDP 42W LED	42	240	0.185	>0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	SP	06-02-2014	FOR –
	CHECKED	DVRS		REV - 0 DATE-06-02-2014
	APPROVED	SC		DRG.No
	DATA SHEET RELEASED ON DT-			BIWIDP 42W LED-001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com