




FLORENCE

BGCP 45W LED WW

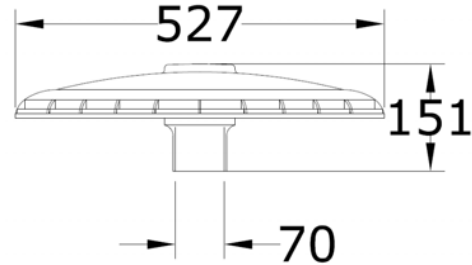

Dimensions in mm Tolerance +/-5

Applications

- Parks and gardens
- Entrance gates
- Pathways
- Residential colonies
- Security lighting

Specifications

- Die cast aluminium graphite grey powder coated finished housing.
- Polycarbonate opal diffuser.
- Low power Warm White (WW) LEDs connected in series and parallel combination with better heat dissipation arrangement.
- Highly efficient constant current electronic driver having operating voltage range from 140-280 Volt AC; provided with high voltage, open and short circuit protection.
- Suitable for 60mm OD pipe entry with fixing bolts.
- Degree of protection IP65
- LED Make - Nichia/ Equivalent
- LED color temperature- 3000°K ±300°K.
- Voltage surge protection 5KV

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	Mains current in Amps. (A) at 240V	System Wattage (W)	Power Factor
112362	BGCP 45W LED WW	240	0.188	45	≥0.95

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	KPM	08-06-2015	FOR -
	CHECKED	RN		REV - 0 DATE-09-09-2015
	APPROVED	SC		DRG. No
	DATA SHEET RELEASED ON DT-			BGCP 45W LED WW - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				E-mail : luminaires@bajajelectricals.com