




LED ROADWAY LUMINAIRE

"CUB PLUS"

BAJAJ BCLST 25W LED I

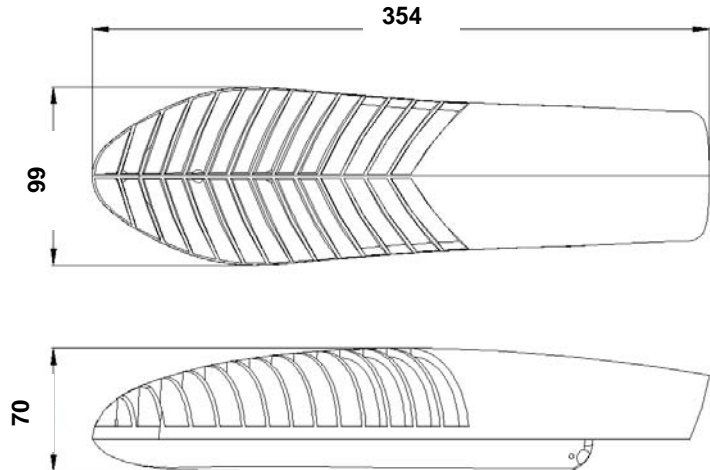

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Side roads,
- Residential complexes,
- Small traffic round-abouts,
- Parks and gardens,
- Security lighting, etc.

Specification

- Epoxy powder coated high pressure die-cast aluminium housing with weatherproof gasket for lamp and control gear accessories.
- Clear polycarbonate front cover fixed with SS screws.
- LED specification – Make: CREE/OSRAM; Color temp.: 5700K ±300K.
- Luminaire is wired with inbuilt driver with 5kV surge protection.
- Input voltage range: 140–310V AC.
- Side entry mounting for 38mm OD pipe bracket.
- Degree of protection : IP65

Electrical Data

Product Code	Cat. Ref.	Input Voltage (V) AC	System Wattage (W) AC	System Current (Amp.) AC	Power Factor
169821	BCLST 25W LED I	240	25	0.110	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	KPM	11-02-2016	FOR -
	CHECKED	SD		REV - 0 DATE-29-03-2016
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BCLST 25W LED I - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com