




LED ROADWAYS LIGHTING LUMINAIRE
"EDGE"
 BRTFG 250W LED

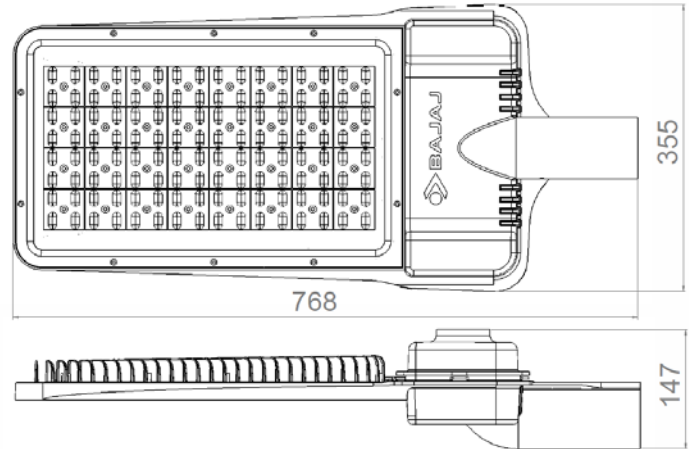

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Arterial roads,
- Main roads,
- Multi-level junctions,
- Traffic round-about,
- Civic centers. etc.

Specification

- Epoxy powder coated pressure die-cast aluminium housing with weatherproof gasket for LEDs and control gear compartments.
- Pressure die-cast aluminium frame with heat resistant toughened clear glass fixed with SS screws.
- LED make : CREE / equivalent.
- Lens make : LedLink / Equivalent
- Driver has protection against lightning, over voltage & short circuit.
- Input voltage range: 140–280V AC.
- Side entry mounting for 50 to 60 mm OD pipe bracket.
- Top maintenance: Access to driver is from the top.
- Ingress protection: IP66

Electrical Data

Product Code	Cat. Ref.	Input Voltage (V) AC	System Wattage (W) AC	System Current (Amp.) @240V AC	Power Factor
169970	BRTFG 250W LED	240	250	1.09	>0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	15-03-2017	FOR –
	CHECKED	RN		REV - 0 DATE-15-12-2017
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BRTFG 250W LED - 001
BAJAJ ELECTRICALS LIMITED LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : luminaires@bajajelectricals.com