




"DOVEE"
RECESS MOUNTING LED DOWNLIGHTER
BZSLO 12W WH / NW / WW NI

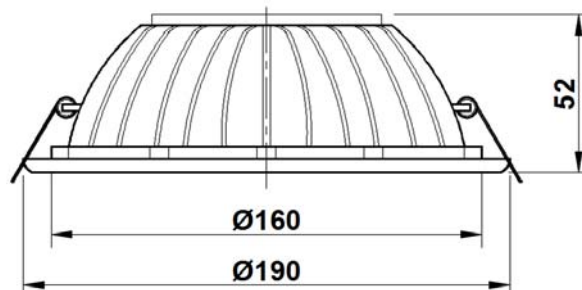

CUTOUT REQUIRED IN CEILING: Ø168mm

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

- Retail showrooms,
- Gallery, Museum,
- Shopping malls,
- Show windows,
- Architectural lighting in modern offices, etc.

Specification

- White powder coated die-cast aluminium housing.
- High power LED chips mounted on MCPCB, pasted on die-cast housing.
- Luminaire is available with different color temperature: White (WH) : 5700K
Neutral White (NW): 4000K
Warm White (WW): 3000K
- Specially designed flat opal diffuser fixed to housing with engg. Plastic front cover.
- Constant current driver is provided separately in Engg. Plastic housing.
- Spring loaded clips provided for easy installation.

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112645	BZSLO 12W WH NI	240	12W	52	0.95
112646	BZSLO 12W NW NI	240	12W	52	0.95
112647	BZSLO 12W WW NI	240	12W	52	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	KPM	04-08-2016	FOR –
	CHECKED	SD		REV - 0 DATE-19-08-2016
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BZSLO 12W WH NI - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com