




"DOVEE"  
RECESS MOUNTING LED DOWNLIGHTER  
BZSLO 18W WH / NW / WW NI

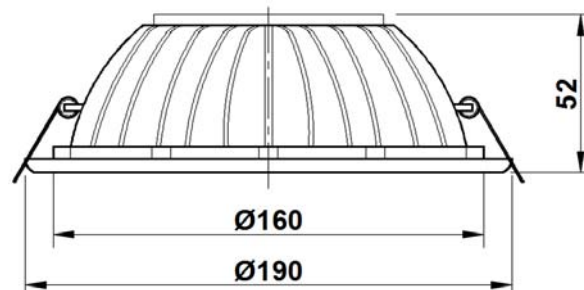

CUTOUT REQUIRED IN CEILING: Ø168mm

NOMINAL DIMENSIONS IN mm Tolerance +/-2

### Application

- Retail showrooms,
- Gallery, Museum,
- Shopping malls,
- Show windows,
- Architectural lighting in modern offices, etc.

### Specification

- White powder coated die-cast aluminium housing.
- High power LED chips mounted on MCPCB, pasted on die-cast housing.
- Luminaire is available with different color temperature: White (WH) : 5700K  
Neutral White (NW): 4000K  
Warm White (WW): 3000K
- Specially designed flat opal diffuser fixed to housing with engg. Plastic front cover.
- Constant current driver is provided separately in Engg. Plastic housing.
- Spring loaded clips provided for easy installation.

### Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112651	BZSLO 18W WH NI	240	18W	78	0.95
112652	BZSLO 18W NW NI	240	18W	78	0.95
112653	BZSLO 18W WW NI	240	18W	78	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	KPM	04-08-2016	FOR –
	CHECKED	SD		REV - 0 DATE-19-08-2016
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			<b>BZSLO 18W WH NI - 001</b>