




SURFACE MOUNTING LED DOWNLIGHTER

BGCML 12W WH / WW / NW

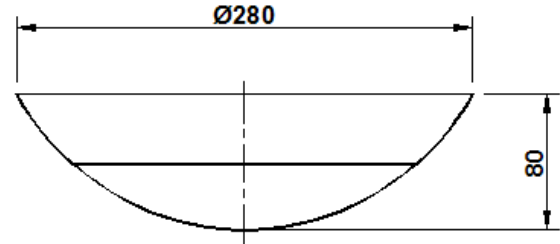

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

- Retail showrooms,
- Gallery, Museum,
- Shopping malls,
- Show windows,
- Architectural lighting in modern offices, Etc.

Specification

- White powder (RAL 9016) coated spun aluminium housing.
- High power LED Chips mounted on MCPCB pasted directly on housing for better thermal management.
- Luminaire is available with different color temperature: White (WH): 5700K
Neutral White (NW): 4000K
Warm White (WW): 3000K
- Easy self-locking mechanism provided on opal diffuser to fit on housing.
- Constant current driver in-built in luminaire.
- Degree of protection – IP20

Electrical Data

| Product Code | Cat. Ref. | System Wattage (W) | Nominal Voltage (V) | Mains Current in Milli Amps. At 240 V | Power Factor |
|--------------|--------------|--------------------|---------------------|---------------------------------------|--------------|
| 111645 | BGCML 12W WH | 12W | 240 | 60 | 0.95 |
| 110648 | BGCML 12W WW | 12W | 240 | 60 | 0.95 |
| 111213 | BGCML 12W NW | 12W | 240 | 60 | 0.95 |

Data subject to variation due to change/improvement in the design, materials and processes.

| | | | | |
|---|----------------------------|------|------------|---|
| | DRAWN | KPM | 25-07-2011 | FOR – Std. |
| | CHECKED | SD | | REV - 2 DATE-15-03-2017 |
| | APPROVED | DVRS | | DRG. No |
| | DATA SHEET RELEASED ON DT- | | | BGCML 12W WH - 001 |
| BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. | | | | * E-mail : luminaires@bajajelectricals.com |