




SURFACE MOUNTING LED DOWNLIGHTER

BGCML 18 095 WH

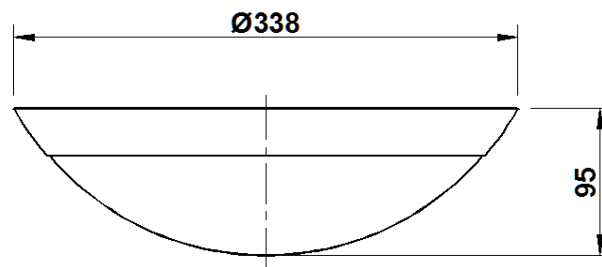

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Retail showrooms,
- Gallery, Museum,
- Shopping malls,
- Show windows,
- Architectural lighting in modern offices, Etc.

Specification

- White powder coated spun aluminium housing.
- White (WH) High power LED Chips mounted on MCPCB pasted directly on housing for better thermal management.
- LED Colour temp. - 5700°K \pm 355
- Easy self-locking mechanism provided on opal diffuser to fit on housing.
- Constant current driver in-built in luminaire.

Electrical Data

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Milli Amps. At 240 V	Power Factor
111646	BGCML 18 095 WH	18W	240	160	0.90

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	10-07-2012	FOR – Std.
	CHECKED	DVRS		REV - 2 DATE-07-03-2014
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BGCML 18 095 WH - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com