




"GREEN LED"

"BATON"

BCLSB 10 WH / BCLSB 10 NW

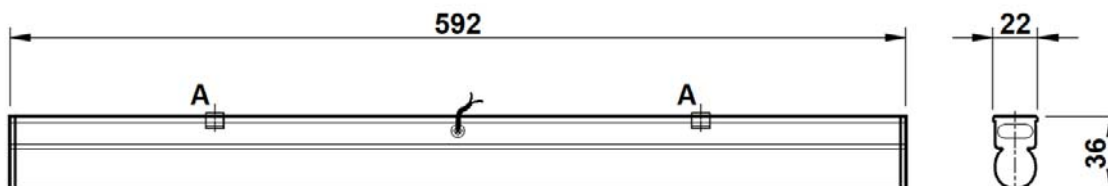

**A = 2 Nos., STAINLESS STEEL MOUNTING CLIPS
WITH Ø4 HOLE FOR MOUNTING**

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices,
- Shopping malls,
- Reception areas,
- Hospitality industry.

Specification

- Polycarbonate co-extrusion tube for LED light housing with engg-plastic end caps.
- Co-extrusion tube top part is made of white polycarbonate material, and the bottom is made of opal diffused polycarbonate material with groove inside for PCB.
- LED populated on PCB comprising of LED's connected in series parallel.
- Luminaire is available with different color temperature: White (WH) : 5700K \pm 300K
Neutral White (NW): 4000K \pm 275K
Warm White (WW): 3000K \pm 250K
- Driver: constant current output driver, operating range 150 – 275V AC supply voltages.
- Very user-friendly and maintenance friendly.

Electrical Data

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Milli Amps. At 240 V	Power Factor
112407	BCLSB 10 WH	10W	240	50	0.90
112408	BCLSB 10 NW	10W	240	50	0.90

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	19-08-2015	FOR –
	CHECKED	SD		REV - 0 DATE-30-09-2015
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			BCLSB 10 WH/NW - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com