




COMMERCIAL DECORATIVE LIGHTING
"CONNECT"
BRTX 28W LED4F WH / NW / WW

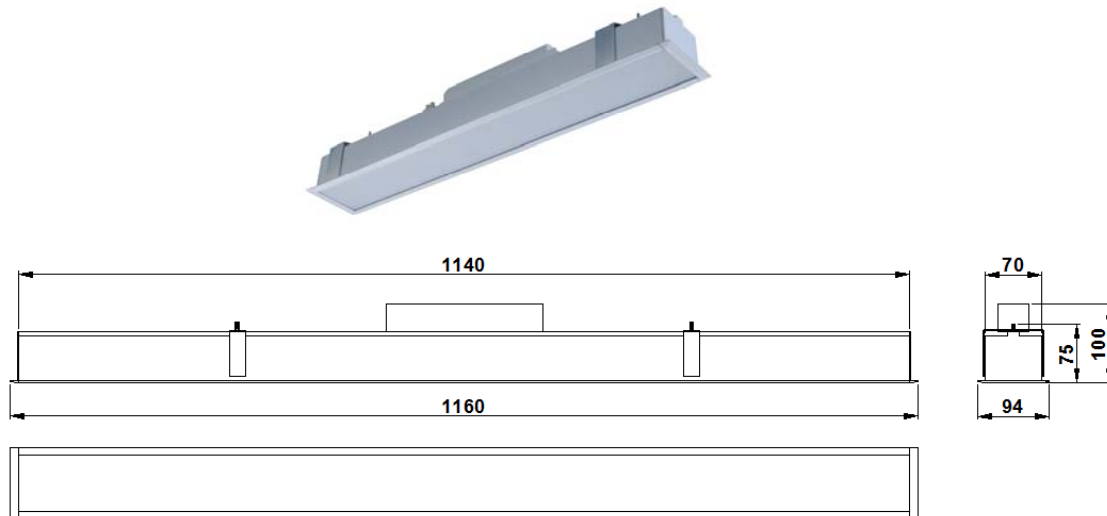

Cutout required in ceiling: 1145mm x 75mm

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Premium & Mini offices, Shopping malls,
- Consultancy rooms, Reception areas,
- Hospitality industry.

Specification

- Housing: Extruded aluminium housing fitted with engg. Plastic end plates.
- Diffuser: Easy fit opal acrylic diffuser provides smooth light distribution.
- Luminaire is available with different color temperature: White (WH) : 5700°K \pm 300°K
Neutral White (NW): 4000°K \pm 275°K
Warm White (WW): 3000°K \pm 250°K
- Driver: constant current output driver, operating range 150 – 275V AC supply voltages, placed externally on top of the luminaire.
- Mounting type: Luminaire is recess mounted with the help of mounting bracket provided behind the luminaire.

Note: For connecting one luminaire to other, refer installation instruction sheet available with the packaging.

Electrical Data

Product Code	Cat. Ref.	Total System Wattage (W)	Nominal Voltage (V)	Mains Current in Milli Amps. At 240 V	Power Factor	THD
112112	BRTX 28W LED4F WH	28	240	125	0.95	<10%
112115	BRTX 28W LED4F NW	28	240	125	0.95	<10%
112208	BRTX 28W LED4F WW	28	240	125	0.95	<10%

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	KPM	16-03-2015	FOR –
	CHECKED	SD		REV - 1 DATE-31-08-2015
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			BRTX 28W LED4F- 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com