




RETAIL LIGHTING

"Flexitron Viva"

BLTRU 40W WH / WW / NW VIVA

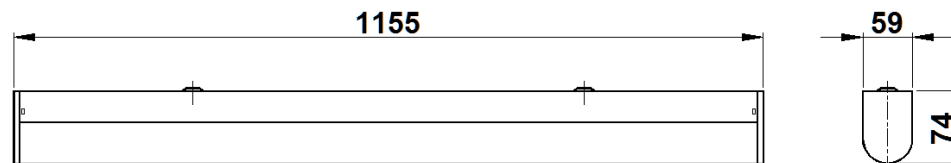

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices
- Shopping malls
- Reception areas
- Hospitality industry

Specification

- CRCA steel sheet housing comprising of White (WH) / Warm White (WW) / Neutral White (NW) LED's connected in series parallel.
- Opal diffuser is supported by a pair of engg. Plastic end plates which facilitate easy removal for maintenance.
- Driver: Constant current output driver, operating range 150 – 275V AC supply voltages.
- The luminaire is suitable for wall or ceiling mounting.
- Finish: White powder coated (RAL 9016)

Electrical Data

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Power Factor
111708	BLTRU 40W WH VIVA	40W	240	0.175	0.95
111709	BLTRU 40W WW VIVA	40W	240	0.175	0.95
111710	BLTRU 40W NW VIVA	40W	240	0.175	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	19-02-2014	FOR –
	CHECKED	SD		REV - 0 DATE-14-03-2014
	APPROVED	SC		DRG.No
	DATA SHEET RELEASED ON DT-			BLTRU 40W WH VIVA - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com