




RETAIL LIGHTING  
LED TRACK MOUNTING LUMINAIRE  
ALPHA 12W WH / WW / NW

Integral projector luminaire for COB LED

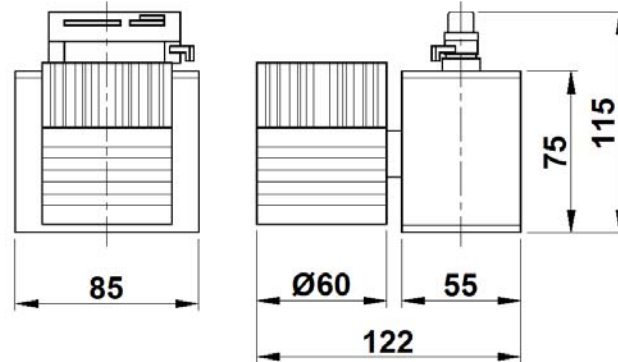

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Applications

- Shopping malls,
- Retail stores,
- Gallery, Museum,
- Show windows, etc.

Features

- Integral projector luminaire
- Aesthetic design
- Easy to install and maintain

Specification

- Swivel type White (WH) / Warm White (WW) / Neutral White (NW) COB LED housing and glass ring is made of die-cast aluminium.
- Extruded aluminium driver compartment.
- Reflector is made of high-purity aluminium.
- Light fixture and electrical equipment have integrated structure, equipped with graduated board.
- White powder coated finish.
- Suitable for single phase track: BLTR 1M 1PH (169120) for 1 mtr.  
BLTR 2M 1PH (169167) for 2 mtr.
- Driver: Constant current output driver, operating range 150 – 275V AC supply voltages.
- Ingress protection – IP20

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112358	ALPHA 12W WH	240	12W	65	0.95
111606	ALPHA 12W WW	240	12W	65	0.95
112359	ALPHA 12W NW	240	12W	65	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	KPM	16-07-2015	FOR –
	CHECKED	SD		REV - 0 DATE-04-08-2015
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			<b>ALPHA 12W WH/WW/NW-01</b>