




COMMERCIAL DECORATIVE LIGHTING  
"CONNECT"  
BPTX 2-28W LED8F NW / WH / WW

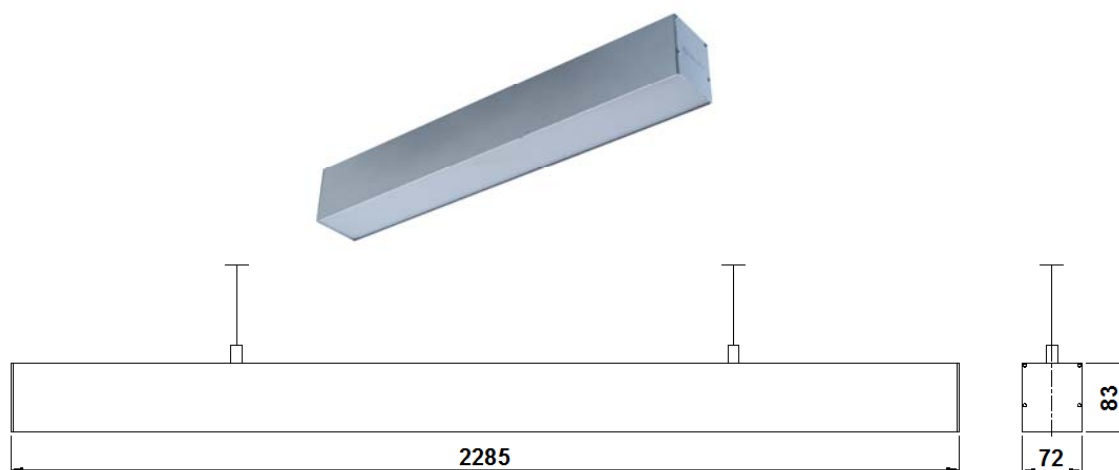

NOMINAL DIMENSIONS IN mm Tolerance +/-5

### Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini Offices, Shopping malls,
- Consultancy rooms, Reception areas,
- Hospitality industry.

### Specification

- Housing: Extruded aluminium housing fitted with metal end cap.
- Diffuser: Easy fit opal acrylic diffuser provides smooth light distribution.
- LEDs: Mounted on PCB and connected in series parallel combination.
- Luminaire is available with different color temperature: White (WH) : 5700°K  $\pm$ 300°K  
Neutral White (NW): 4000°K  $\pm$ 275°K  
Warm White (WW): 3000°K  $\pm$ 250°K
- Driver: 2 nos., Constant current output driver, operating range 150 – 275V AC supply voltages.
- Mounting type: Luminaire is suspended with the help of 2 nos., of suspension system (1.5 mtr. Length) which comes along with luminaire.

**Note:** For connecting one luminaire to other, refer installation instruction sheet available with the packaging.

### Electrical Data

Product Code	Cat. Ref.	Total System Wattage (W)	Nominal Voltage (V)	Mains Current in Milli Amps. At 240 V	Power Factor	THD.
112220	BPTX 2-28W LED8F NW	56	240	250	0.95	<10%
112221	BPTX 2-28W LED8F WH	56	240	250	0.95	<10%
112222	BPTX 2-28W LED8F WW	56	240	250	0.95	<10%

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	KPM	16-03-2015	FOR –
	CHECKED	SP		REV - 0 DATE-31-08-2015
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			<b>BPTX 2-28W LED8F- 001</b>
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>