




LED RETAIL LIGHTING

BLSPD LED 24W / 36W / 50W WH

Suspendent Type Decorative LED Low bay Luminaire

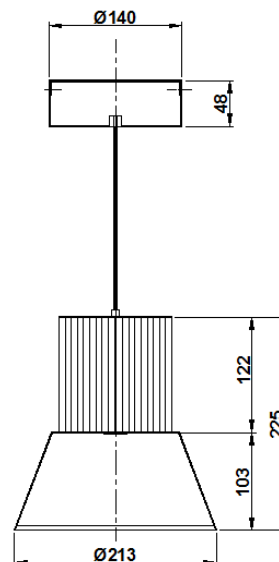

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Commercial malls,
- Atrium, etc.

Specifications

- Decorative Integral die-cast aluminium housing comprises of anodized aluminium reflector.
- COB LED mounted on extruded aluminium heat sink for better thermal management.
- COB LED color temperature: White (WH) : 5700K
- Aesthetically appealing to suit any interior.
- Driver: Constant current output driver, operating range 150–275V AC supply voltages.
- Mounting type: Surface mounting through suspension wire.

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112475	BLSPD LED 24W WH	240	24W	110	0.95
112476	BLSPD LED 36W WH	240	36W	160	0.95
112477	BLSPD LED 50W WH	240	50W	225	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	KPM	17-12-2015	FOR –
	CHECKED	SD		REV - 0 DATE-02-05-2016
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			BLSPD LED 50W WH - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com