




## RECESS MOUNTING 2' x 2' FLAT LED PANEL "DOMINTO DYNA"

BCTBLR 36W LED FP WHN

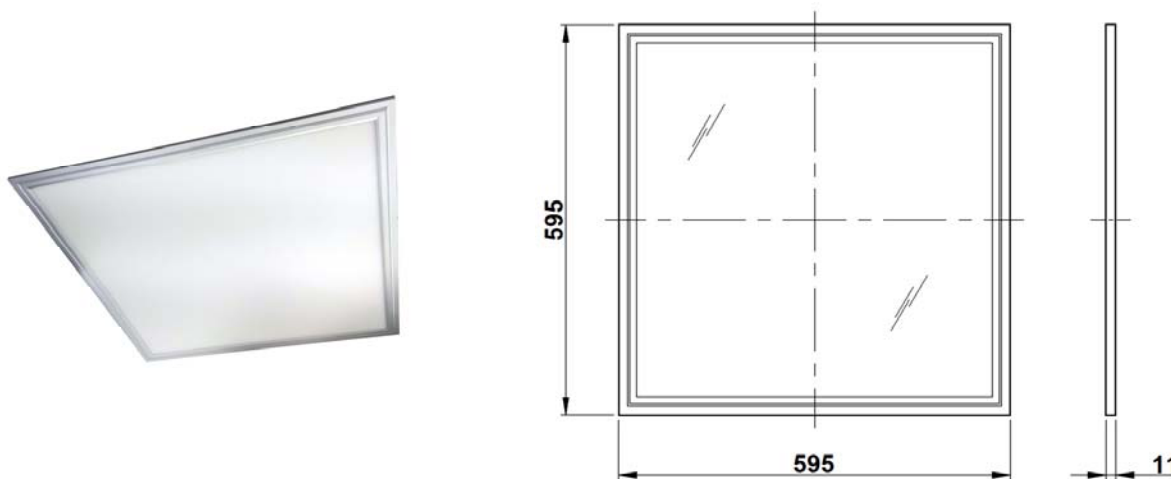

NOMINAL DIMENSIONS IN mm Tolerance +/-2

### Application

Recess mounting LED luminaire suitable for interior illumination of:

- Commercial offices, Board Rooms,
- COE cabins, Banks, Computer centers,
- Banks, Showrooms, Laboratories, etc.

### Specification

- Energy efficient recess mounted LED flat panel with side-emitting LED array.
- Extruded aluminium housing contains LEDs source. Has a high efficiency opal polystyrene diffuser, which provides higher lumen package to create uniform & diffuse appearance.
- Luminaire is operating with multi CCT : 2700K to 5700K
- Luminaire Wattage range: 36W max. to 8W min.
- Electronic analog dimmable Driver, input operating voltage range 150–275V AC; provided with short circuit protection.
- Luminaire provided with remote controller to control Wattage and CCT.
- Frame finish: White powder coated.
- Ingress Protection : IP20

### Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (Max.-Min.) (W)	Mains Current in Amps. (Max.-Min.) At 240V	Power Factor (Max.-Min.)
112827	BCTBLR 36W LED FP WHN	240V	36W – 9W	0.16 – 0.06	0.95 – 0.66

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	KPM	12-06-2017	FOR –
	CHECKED	AS		REV - 1 DATE-20-03-2018
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON –			<b>BCTBLR 36W LED FP WHN-01</b>
<b>BAJAJ ELECTRICALS LIMITED</b> LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>