




4' x 1' RECESS LED LUMINAIRES

BZRSLG GX 34W CW

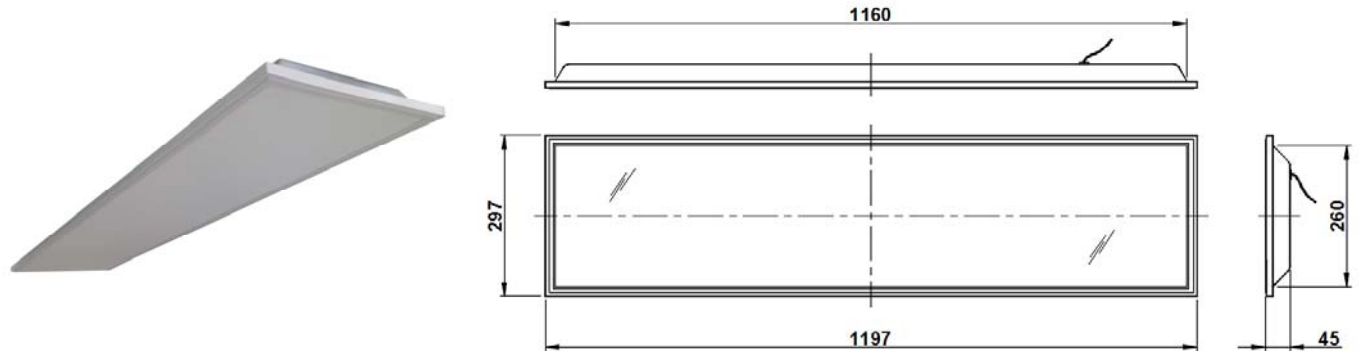

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

Recess mounting LED luminaire suitable for interior illumination of:

- Commercial complexes, Showrooms,
- Airport lounges, computer centers,
- Banks, Hospitals, Conference halls,
- Design offices, Control rooms, Laboratories, etc.

Specification

- Deep drawn CRCA sheet steel housing comprising of LED's.
- Opal diffuser fixed in separate engg. Plastic frame.
- Luminaire is available with LED color temperature: 6000K \pm 350K
- Driver: Constant current output driver, operating range 150–265V AC supply voltages.
- Ingress protection: IP20

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112683	BZRSLG GX 34W CW	240	34W	149	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	KPM	16-08-2016	FOR –
	CHECKED	AS		REV - 1 DATE–20-04-2017
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BZRSLG GX 34W CW - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com