




2' x 2' RECESS LED LUMINAIRES

"SKYLUX"

BZRSQ W3 XEi WH / NW

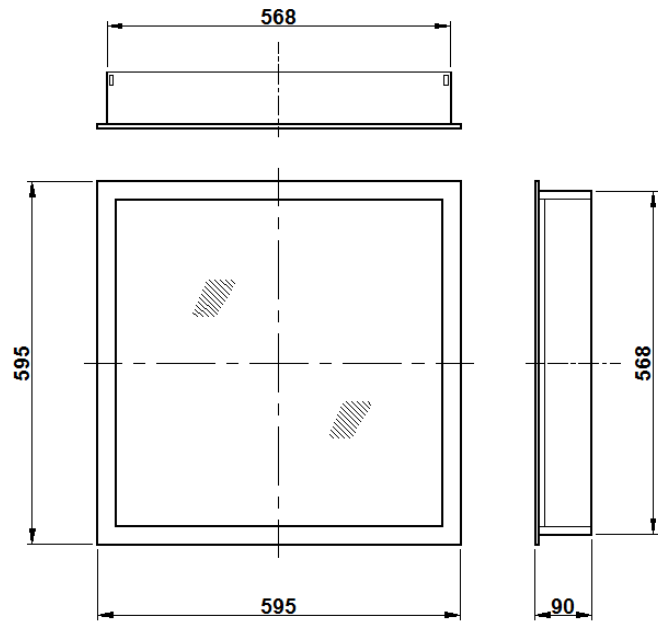

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

Recess mounting LED luminaire suitable for interior illumination of:

- Commercial complexes, Showrooms,
- Airport lounges, computer centers,
- Banks, Hospitals, Conference halls,
- Design offices, Control rooms, Laboratories, etc.

Specification

- CRCA steel sheet housing comprising of LED's connected in series parallel.
- Luminaire is available with different color temperatures: White (WH): 5700K
Neutral White (NW): 4000K
- Opal diffuser fixed in separate CRCA sheet steel frame.
- Opal diffuser frame is held in with housing by screws for easy maintenance.
- Driver: Constant current output driver, operating range 150 – 265V AC supply voltages.
- Finish: Housing white powder coated. (RAL 9016)

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112825	BZRSQ W3 XEi WH	240	30W	135	0.95
112826	BZRSQ W3 XEi NW	240	30W	135	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	15-03-2017	FOR –
	CHECKED	SD		REV - 0 DATE-30-06-2017
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BZRSQ W3 XEi WH - 001
BAJAJ ELECTRICALS LIMITED LUMINAIRE BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : luminaires@bajajelectricals.com