




4' x 1' RECESS LED LUMINAIRE

BZRSLL 36W GZ1 WH / NW / CW

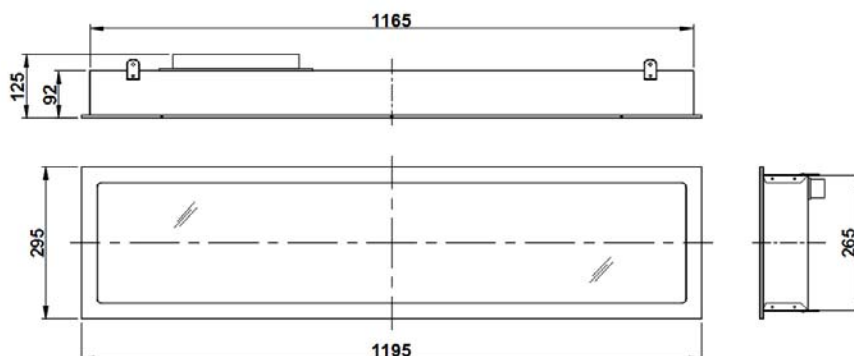

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

Recess mounting LED luminaire suitable for interior illumination of:

- Commercial complexes, Showrooms,
- Airport lounges, computer centers,
- Banks, Hospitals, Conference halls,
- Design offices, Control rooms, Laboratories, etc.

Specification

- PPGI (pre-painted galvanised iron) sheet steel housing comprising of LED's connected in series parallel.
- Luminaire is available with different color temperature: White (WH) : 5700K
Neutral White (NW): 4000K
Cool White (CW): 6500K
- Opal diffuser fixed in separate white powder coated sheet steel frame.
- Opal diffuser frame is held in with housing by screws for easy maintenance.
- Driver: Constant current output driver, operating range 150–265V AC supply voltages.
- Ingress Protection : IP20

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112665	BZRSLL 36W GZ1 WH	240	36W	157	0.95
112666	BZRSLL 36W GZ1 NW	240	36W	157	0.95
112667	BZRSLL 36W GZ1 CW	240	36W	157	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	KPM	27-07-2016	FOR –
	CHECKED	SP		REV - 0 DATE-13-09-2016
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BZRSLL 36W GZ1 WH - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com