




LED INDUSTRIAL LIGHTING  
UNDER CANOPY LUMINAIRE "COSMO"

BAJAJ BGPPR 80W LED V2

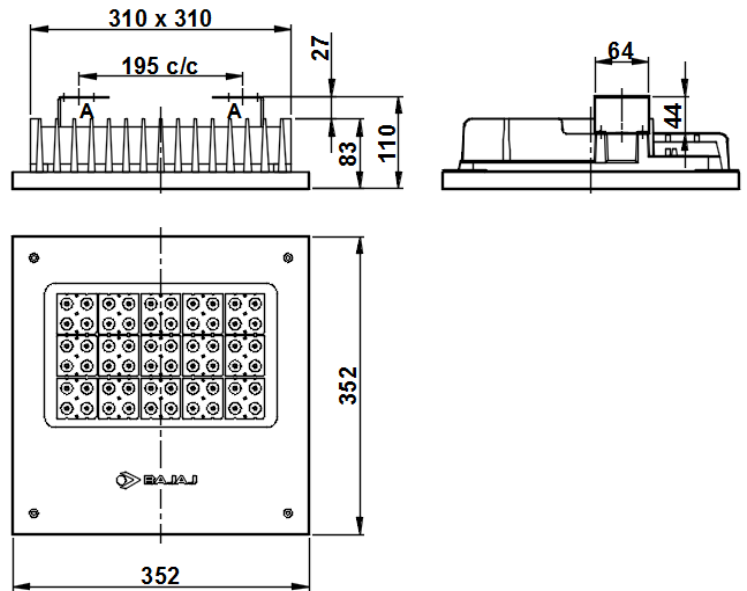

CEILING CUTOUT REQUIRED = 315mm x 315mm  
A = 2 Nos., Ø20 HOLES

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Petrol Pumps
- Under canopy light
- Public halls

Specification

- Epoxy powder coated (RAL 9016) pressure die-cast aluminum housing.
- CRCA sheet steel recessed frame, heat resistance clear toughened glass and silicon gasket fixed with SS screws.
- 2 nos., non-potted LED driver used is specially designed to have open/short circuit protections.
- In addition to built-in 4kV surge protection in driver, it is equipped with 10kV external surge protection.
- LED specification – Make – OSRAM/Equivalent.  
Colour Temp. 5700K
- Ingress Protection: IP65

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	System Current (Amp)	Power Factor
169932	BGPPR 80W LED V2	240	80	0.350	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	KPM	08-05-2017	FOR - IOCL
	CHECKED	RN		REV - 1 DATE-19-06-2017
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			<b>BGPPR 80W LED V2 - 001</b>