


150W LED Highbay Luminaire

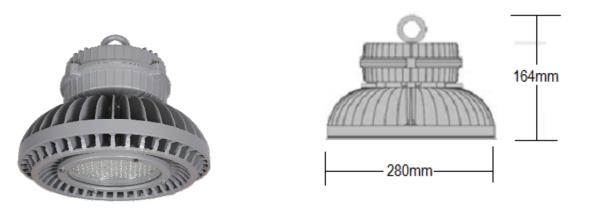

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Airport hangers and warehouses, Heavy engineering industries,
- Thermal power stations, Railway concourse halls, Steel plants,
- Shopping malls, Departmental stores, Food plaza, etc.

Specification

- Powder coated high pressure die-cast aluminium housing and LED driver compartment.
- Eye-bolt provided for suspension mounting.
- LED fixed on die-cast aluminum heat sink for proper thermal management.
- LED Colour Temp. from 5700°K \pm 300°K.
- Optics: Secondary lens optics provided.
- Driver: Constant voltage constant current SMPS, operating voltage range 100–300V AC, provided with open and short circuit protection and input surge voltage protection (L-E & N-E: 15kV and L-N: 10kV)
- Completely prewired with accessories up to terminal block.
- Ingress Protection: IP66

Electrical Data

Product	Cat. Ref.	Nominal	System	Mains Current	Power
Code		Voltage	Wattage	in Amps.	Factor
		(V) AC	(W)	At 240V AC	
169709	BGHB 150W LED GIV	240	150W	0.685	> 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	14-01-2015	FOR –			
	CHECKED	SM		REV - 0	DATE-17-03-2015		
Making the difference	APPROVED	SC		DRG. No			
Making the unterence	DATA SHEET RELEASED ON DT-			BGHB 150W LED GIV - 01			
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. * E-mail : <u>luminaires@bajajelectricals.cor</u>							