




LED INDUSTRIAL LIGHTING "DURANTO"

BAJAJ BGHB 80W LED GV

80W LED Highbay Luminaire

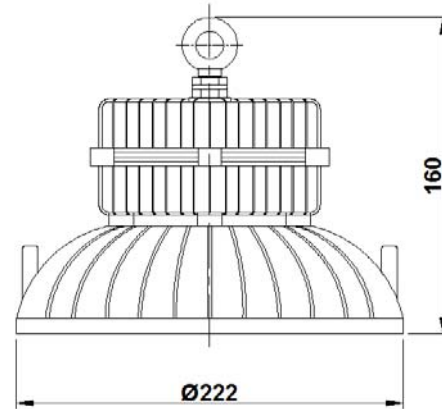

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Airport hangers and warehouses, Engineering industries,
- Thermal power stations, Railway concourse halls, Steel plants,
- Shopping malls, Departmental stores, Food plaza, etc.

Specification

- Powder coated high pressure die-cast aluminium housing and LED driver compartment.
- Eye-bolt provided for suspension mounting.
- LED fixed on die-cast aluminum heat sink for proper thermal management.
- LED Colour Temp. : 5700K
- Optics: Secondary lens optics provided.
- Driver: Constant voltage constant current SMPS, operating voltage range 100–300V AC, provided with open and short circuit protection and input surge voltage protection (L-E & N-E: 15kV and L-N: 10kV)
- Completely prewired with accessories up to terminal block.
- Ingress Protection: IP65

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V) AC	System Wattage (W)	Mains Current in Amps. At 240V AC	Power Factor
169871	BGHB 80W LED GV	240	80W	0.35	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	30-04-2016	FOR -
	CHECKED	SD		REV - 0 DATE-27-09-2016
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BGHB 80W LED GV - 01