




LED INDUSTRIAL LIGHTING LUMINAIRES

BI PC 40W LED

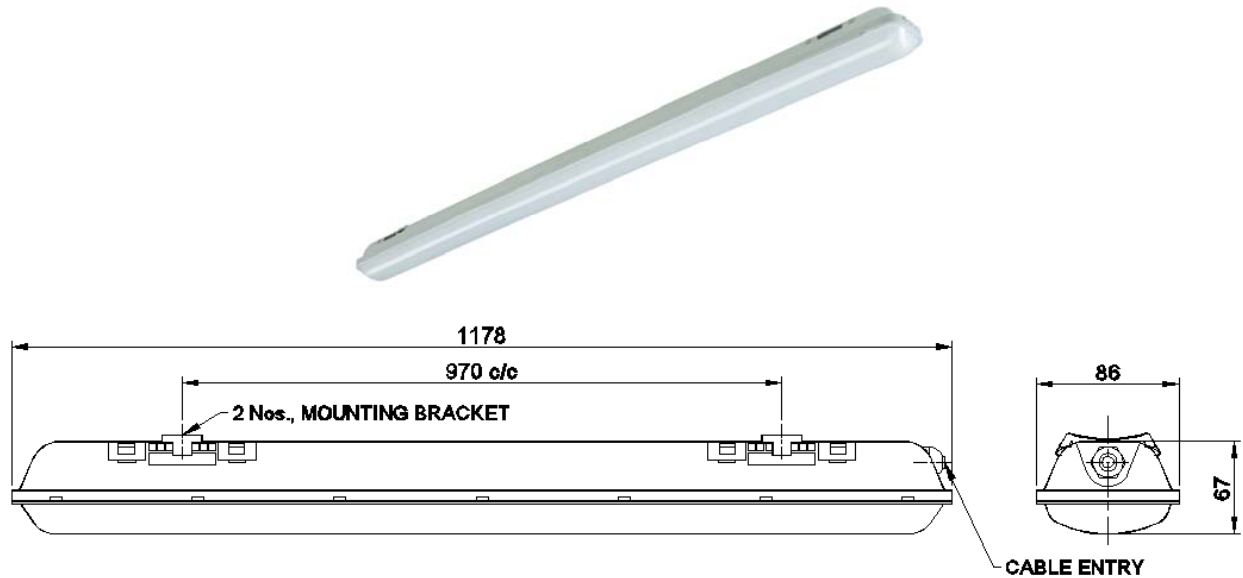

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

Dairies, Chemical industries, Food processing plant, Laboratories, Paint factories, Paper mills, Textile mills, Car washing bay, Catering kitchens, Grain shops.

Specification

- LED luminaire comprises of polycarbonate housing and polycarbonate diffuser.
- White (WH) LED's connected in series parallel and mounted on extruded aluminium tray.
- LED color temperature: White (WH): 5700K
- Driver: Constant current output driver, operating range 160–280V AC supply voltages.
- Completely prewired with accessories up to terminal block.
- Housing color: Grey
- Luminaire is suitable for surface mounting.
- Degree of protection: IP65

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
169898	BI PC 40W LED	240	40W	180	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	25-01-2017	FOR –
	CHECKED	RN		REV - 0 DATE-25-01-2017
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			BI PC 40W LED - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com