


Integral LED Bay Luminaire

BTS 80W WH LED

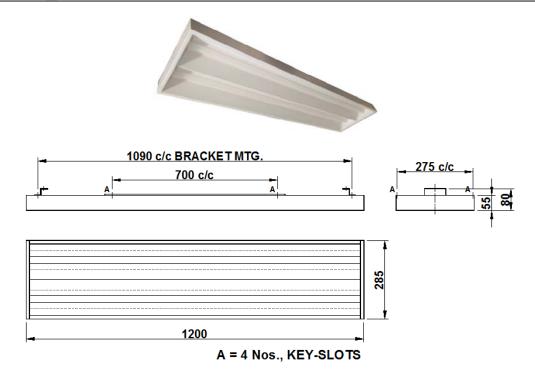

Dimensions in mm Tolerance: +/-5

Application

- Departmental Stores and control rooms, Entrance Lobbies,
- Bank and Offices, Conference halls and control rooms,
- Hospital and laboratories, Computer centers, Etc.

Specification

- Energy saving decorative surface/suspended mounted LED luminaire.
- The elegant design enhances the aesthetic and suits indoor usage.
- CRCA steel sheet housing comprising of polycarbonate diffusers and White (WH) LED's.
- Luminaire is available with color temperature: White (WH) : 5700K ±300K
- White powder coated reflector for enhanced light distribution.
- Control gear access on top side.
- Wired with constant current driver.
- Degree of protection: IP20

Note: "Y" type suspension for suspended mounting to be order separately:

Cat. Ref. BTS SUSPENSION 1.5M - 953518

Electrical Data

Product	Cat. Ref.	System	Nominal	Mains Current	Power	Lumen
Code		Wattage	Voltage	in Milli Amps.	Factor	Package
		(W)	(V)	At 240 V		_
169742	BTS 80W WH LED	80W	240	350	0.95	8428 lm

Data subject to variation due to change/improvement in the design, materials and processes.

The state of the s	DRAWN	KPM	30-10-2014	FOR –
BAJAJ LUMINAIRES Making the difference	CHECKED	SP		REV - 1 DATE-08-02-2016
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			BTS 80W WH LED - 001