


INDUSTRIAL LIGHTING LED HighBay Luminaire BTHBX 100W LED WH

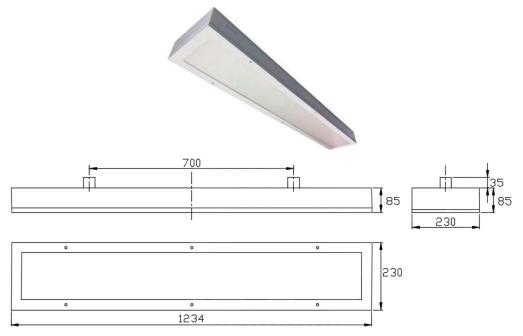

Dimensions in mm Tolerance = +/-5

Application

- Departmental Stores and control rooms
- Manufacturing Industries,
- Textile manufacturing
- · Automobile & ancillary manufacturing,
- Warehouses,
- · Railway concourse halls, Railway Platforms, etc.

Specification / Features

- Energy saving pendent multifunctional luminaire.
- The elegant design enhances the aesthetic and suits indoor usage.
- Housing: CRCA frame with opal diffused acrylic for smooth & uniform distribution of light.
- Frame: Hingeable CRCA frame for easy maintenance.
- Mounting bracket: Provided with two nos. of bracket having Ø20 mm holes for conduit mounting. Also suitable with wire suspension system.
- Maintenance from front side.
- Driver: Constant current output driver, operating range 150 265V AC supply voltages.
- LED: -5700 ± 300 k.
- Degree of protection: IP54 (from front side).

Electrical Data

Electrical Bata										
	Product	Cat. Ref.	System	Nominal	Mains Current	Power				
	Code		Wattage	Voltage	in Amps.	Factor				
			(W)	(V)	at 240 V AC					
	169784	BTHBX 100W LED WH	100 W	240	0.440	<u>></u> 0.95				

Data subject to variation due to change/improvement in the design, materials and processes.

A STATE OF THE STA	DRAWN	SP	01-07-2015	FOR -	
BAJAJ LUMINAIRES	CHECKED	SP		REV - 1	DATE-20-08-15
Making the difference	APPROVED	DVRS		DRG.No	
Making the unference	DATA SHEET RELEASED ON DT-			BTHBX 100W LED WH-001	