




LED ROADWAY LIGHTING LUMINAIRE
"EDGE-PLUS"
 BRLEP 60W LED V2

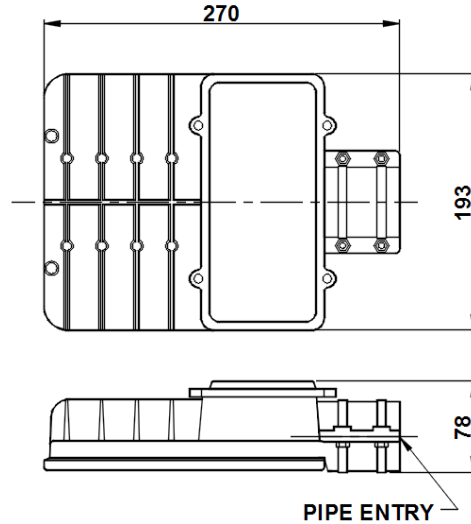

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Arterial roads, Main roads,
- Multi-level junctions, Traffic round-about,
- Civic centers. etc.

Specification

- Epoxy powder coated pressure die-cast aluminium housing with weatherproof gasket for LEDs and control gear compartments.
- Electrochemically brightened and anodized aluminium reflector.
- LED specification – High power LED chip, Color temp.: 5700K ±300K
- LEDs provided with non-yellowing polycarbonate secondary lens optics.
- In addition to built-in 5kV surge protection in driver, it is equipped with 10kV external surge protection.
- Input voltage range: 100-300V AC.
- Side entry mounting for 50 mm OD pipe bracket.
- Ingress protection: IP66

Electrical Data

Product Code	Cat. Ref.	Input Voltage (V) AC	System Wattage (W) AC	System Current (Amp.) @240V AC	Power Factor
169941	BRLEP 60W LED V2	240	60	0.26	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	27-06-2017	FOR -
	CHECKED	SA		REV - 1 DATE-16-08-2017
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BRLEP 60W LED V2 - 01
BAJAJ ELECTRICALS LIMITED LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : luminaires@bajajelectricals.com